



—
your partner
in sensor
technology.



Datasheet HTS801

**Humidity and Temperature Sensor for
High Humidity and Chemically
Polluted Conditions**



HTS801

Humidity and Temperature Sensor for High Humidity and Chemically Polluted Conditions

The HTS801 sensors are designed to meet highest demands of stable and highly accurate measurement of relative humidity (RH) and temperature (T) under most challenging conditions. HTS801 is suitable for a wide range of applications from -80 °C to 180 °C (-112 °F to 356 °F) and 300 bar (4 350 psi).

Outstanding Measurement Performance

The heated high-end E+E RH and T sensing element enables reliable and long-term stable measurement in extremely humid or chemically polluted environment. The monolithic structure of the RH/T sensing element, protected by the E+E proprietary coating, allows for fast recovery after condensation or chemical contamination.

Versatile and Robust

The six HTS801 versions are available with several probe and cable lengths. With various heating modes, the HTS801 can be perfectly tailored to the specific needs of each measurement task. It features an IP65/NEMA 4 polycarbonate or stainless-steel enclosure which can accommodate various interface modules and electrical connection options.

Outputs and Configuration

The measured data is available on two freely scalable analogue outputs, on the RS485 (Modbus RTU) or Ethernet-PoE (Modbus TCP, M12 X-coded connection) interface and on the alarm (relay) outputs. The configuration and the RH and T adjustment of the HTS801 can be performed with the free PCS10 Product Configuration Software. An optional 3.5" colour display with push-buttons is available for configuration and visualisation.



HTS801 with polycarbonate enclosure and display



Sensing probes



HTS801 with stainless steel enclosure and display

Features

Measurement performance

- Highest RH/T accuracy
- Working range -80...+180 °C (-112...+356 °F)
up to 300 bar (4 350 psi)
- Designed for chemical contamination and continuous high humidity conditions
- All RH related physical quantities

3.5" TFT colour display

- Shows up to 4 measurands simultaneously
- Layout and measurands freely selectable
- Data logger for 20 000 values per measurand
- Logged data shown graphically
- Diagnosis functions
- Intuitive device setup with push-buttons

Enclosure

- IP65/NEMA 4X protection rating
- Polycarbonate or stainless steel
- Easy mounting and service
- Versatile connection options
- Modular design

Outputs

- 2 freely scalable analogue outputs
current / voltage
- Error indication according to NAMUR
- Modbus RTU/Modbus TCP
- 2 alarm outputs
- Configurable via software or push-buttons

USB service interface and PCS10 software

- Configuration, adjustment and firmware update
- Download eventlog and RH/T histogram data
- View sensor status information
- 5 status LEDs

RH/T sensing element


- Operating modes
 - Condensation Guard (CG)
 - High Humidity Guard (H²G)
- Automatic ReCovey (ARC)
- Protected by:
 - E+E proprietary coating
 - Wide choice of filter caps

Sensing Probes

- rapidX intelligent pluggable probe with included sensing element data
- Six probes depending on
 - T range
 - p range
 - Environmental condition
- Various probe and cable lengths
- T7 optimized for high dew point measurement
- T28 with specific design for best fit in high-end radiation shields

Inspection certificate

According to DIN EN 10204-3.1

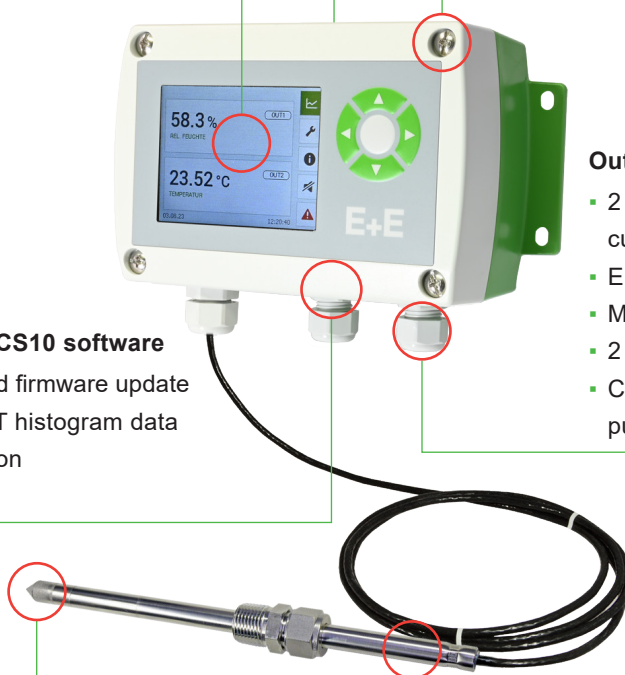

Features

rapidX Smart Probe

The HTS801 with PC7 option (see ordering guide) features the intelligent pluggable rapidX probe, which enables a plug-and-play probe exchange. Any HTS801 rapidX Smart Probe automatically uploads its specific parameters upon connecting it to the HTS801 electronics and can be replaced even during operation without any configuration, adjustment or calibration. This is particularly useful for excluding down time and its corresponding costs in harsh industrial environment, where the probe can get occasionally damaged.

Protective Sensor Coating

The E+E proprietary sensor coating is a protective layer applied to the sensing elements, their leads and soldering points. The coating substantially extends sensor lifetime and ensures optimal measurement performance in corrosive environment (salts, off-shore applications). Additionally, it improves the long term stability in dusty, dirty or oily applications by preventing stray impedance caused by deposits on the active sensor surface or on the electrical connections.

Automatic ReCovery (ARC) Function

Automatic ReCovery (ARC) is available for all HTS801 types and is used to remove chemical pollution and thus eliminate possible drift effects of the RH/T sensing element. This is achieved with an intense heating of the sensing element. The function can be perfectly tailored to the application requirements being triggered:

- manually via PCS10 or display and push-buttons,
- by a certain cyclic time interval configurable via PCS10,
- using RS485 or Ethernet with Modbus commands or
- using the ARC module option (AM1).

Type-specific Operating Modes

Condensation Guard (CG)

HTS801 sensors with Condensation Guard (CG) are designed for applications with variable humidity over the full range 0...100 %RH where condensation may occur for a short time. The CG protects the RH/T sensing element by targeted heating and prevents temporary condensation and its negative effects on the measurement results. The CG heating is triggered by a predefined RH setpoint factory set via ordering guide. The setpoint is configurable with PCS10 and display and push buttons.

High Humidity Guard (H²G)

HTS801 sensors with High Humidity Guard (H²G) enable accurate RH measurement even in permanent high humidity and condensing conditions. Continuous, adaptive heating of the sensing element and of the probe body (dual heating system) prevents drift effects and condensation on the sensor element. The monolithic construction of the sensing element enables fast RH response times under condensing conditions.

Operating Mode	HTS801 Type	Use in environments with	Function Trigger
Condensation Guard (CG)	T5/T9/T10	Temporary condensation	RH setpoint ¹⁾
High Humidity Guard (H ² G)	T7/T17/T28	Continuous high humidity and condensation	Always on

1) Factory setting: acc. to ordering guide

Features

Accredited Traceable Calibration Certificate



Internationally recognised certificates for the calibration of measuring instruments from accredited laboratories document the traceability of the measurements to the International System of Units (SI). The E+E Elektronik calibration laboratory offers two levels of traceable calibrations.

- As a Designated Institute (DI) of the Republic of Austria, the E+E calibration laboratory maintains Austria's national measurement standards for humidity, dew point temperature, air velocity and CO₂. This authorises the E+E calibration laboratory to issue calibration certificates at the level of a National Metrological Institute (NMI).
- The E+E calibration laboratory is accredited by Akkreditierung Austria in accordance with DIN EN ISO/IEC 17025 with the identification number 0608. This allows the laboratory to issue ISO 17025 certificates for the measurands humidity, temperature, dew point temperature, air velocity, flow, pressure and CO₂.

Visit www.eplusecal.com for detailed information on calibration and to enquire a certificate of accredited traceable calibration for the HTS801 from the Designated Institute.

ISO 9001 Calibration Certificate

An ISO 9001 calibration certificate documents the comparative measurement of a device against high quality reference equipment (factory level standard). The comparison is performed in accordance with internal procedures that comply with ISO 9001 and provides information on the specimen's measuring accuracy. The reference equipment is traceable to national standards, however, the calibration process is not accredited. Therefore, an ISO 9001 calibration is neither traceable nor internationally comparable.


Visit www.epluse.com/iso9001cal for detailed information on calibration and to enquire an ISO 9001 calibration certificate.

Dimensions


Values in mm (inch)

Enclosure

Polycarbonate (with and without display)

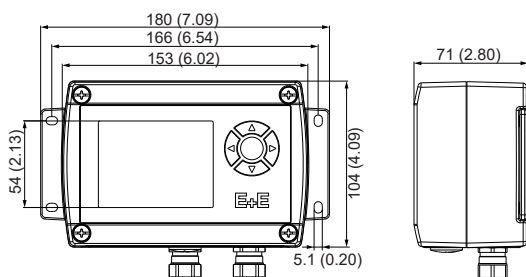


Stainless steel (with and without display)

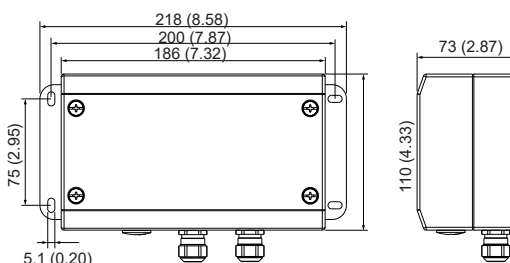


Type T5 Probe

Up to 180 °C (356 °F)

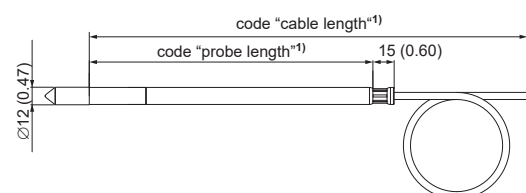


Type T7 Probe

Pressure-tight up to 20 bar (300 psi) for Td measurement

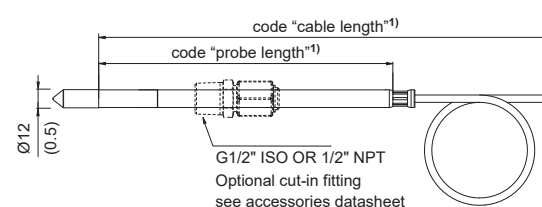


Type T9 Probe

Pressure-tight up to 300 bar (4 350 psi) with cut-in fitting

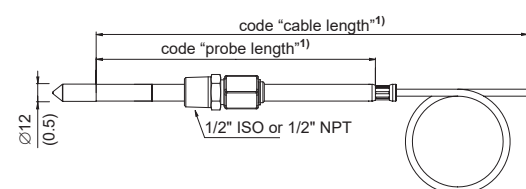


Type T10 Probe

Pressure-tight up to 20 bar (300 psi) with sliding fitting

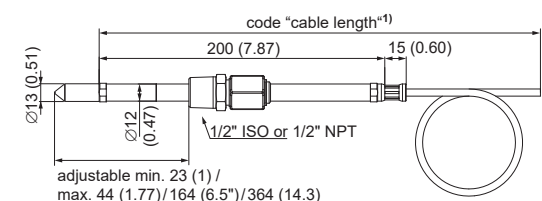


Type T17 Probe

Pressure-tight up to 20 bar (300 psi) with optional cut-in fitting

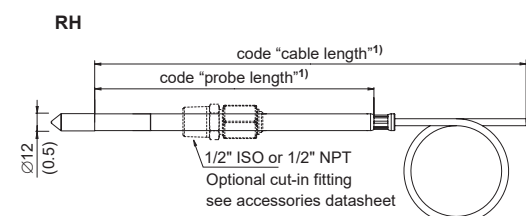

Type T28 Probe

For meteorological applications

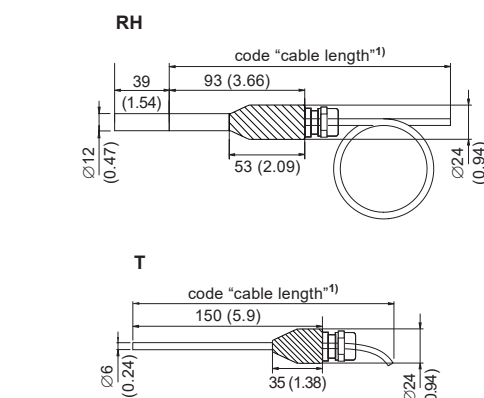

1) Refer to ordering guide

Technical Data

Measurands

Relative Humidity (RH)

Measuring range	0...100 %RH
Accuracy ¹⁾ , incl. hysteresis, non-linearity and repeatability	$\pm(0.95 + 0.0013 \cdot mv) \%RH$ $\pm 1.8 \%RH$ $\pm(1.05 + 0.0084 \cdot mv) \%RH$ $\pm(1.15 + 0.013 \cdot mv) \%RH$ $\pm 3.85 \%RH$
Factory calibration uncertainty ²⁾	$\pm(0.7 + 0.003 \cdot mv) \%RH$ $\pm 1 \%RH$
Temperature dependency of electronics, typ.	$\pm 0.01 \% RH / ^\circ C$ ($0.0056 \%RH / ^\circ F$)
Response time t_{90} with metal grid filter at 20 °C (68 °F)	<15 s


mv = measured value

mv = measured value

1) Defined against E+E calibration reference.

2) Defined at 23 °C with an coverage factor k=2, corresponding to a confidence level of 95 %.

Temperature (T)

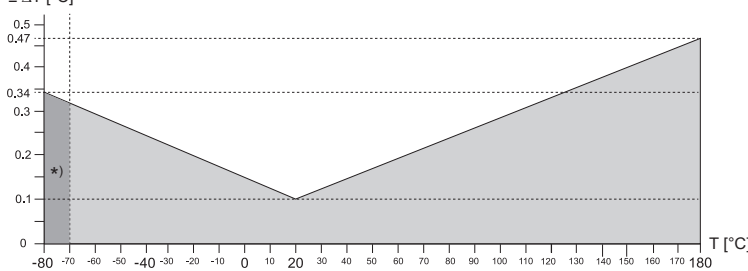Measuring range probe	Types T5/T7/T9/T10 Type T17 Type T28
Accuracy ¹⁾	$\pm \Delta T [^\circ C]$ 
Factory calibration uncertainty ²⁾ @ 23 °C (73 °F)	$\pm 0.05 ^\circ C$
Temperature dependency of electronics, typ.	$\pm 0.001 ^\circ C / ^\circ C$

*) T17/T28 T measurement down to -80 °C (-112 °F), RH measurement down to -70 °C (-94 °F)

1) Defined against E+E calibration reference.

2) Defined at 23 °C with an coverage factor k=2, corresponding to a confidence level of 95 %.

Calculated Physical Quantities

	from	up to		unit
		HTS801-xT5/T9/T10/T17/T28	HTS801-xT7	
Dew point temperature ¹⁾	Td	-80 (-112)	100 (212)	°C (°F)
Frost point temperature ²⁾	Tf	-80 (-112)	0 (32)	°C (°F)
Wet bulb temperature	Tw	-5 (23)	100 (212)	°C (°F)
Water vapour partial pressure	e	0 (0)	1100 (15)	mbar (psi)
Mixing ratio	r	0 (0)	999 (9999)	g/kg (gr/lb)
Absolute humidity	dv	0 (0)	700 (300)	g/m ³ (gr/ft ³)
Specific enthalpy	h	0 (0)	2800 (1250)	kJ/kg (BTU/lb)

1) Td accuracy according to RH and T uncertainties, please use the [E+E Humidity Calculator](#) for details.

2) Equals Td above 0 °C (32 °F)

Technical Data

Outputs

Analogue

Two freely selectable and scalable analogue outputs	0 - 1 / 5 / 10 V 0 - 20 mA / 4 - 20 mA (3-wire) Both outputs have the same electrical quantity (voltage, current)	-1 mA < I_L < 1 mA R_L < 500 Ω	I_L = load current R_L = load resistance
Accuracy @23 °C (68 °F)	±0.05 % FS		
Temperature dependency ¹⁾	±0.005 % FS / °C		
Two alarm outputs with option AM2 ²⁾	2x changeover contact 250 V AC / 6 A 28 V DC / 6 A Measurand, threshold and hysteresis configurable via PCS10 or display and push-buttons		

1) Deviating from 23 °C (68 °F), defined at 12 mA or 5 V, respectively

2) Appropriate for outdoor use, wet location, degree of pollution 2, overvoltage category II, altitude up to 3 000 m (9 843 ft)

Digital

Digital interface Protocol Factory settings Supported Baud rates	RS485 (HTS801 = 1 unit load) Modbus RTU 9600 Baud, parity even, 1 stop bit, Modbus address 230 9600, 19200, 38400, 57600 and 76800
Digital interface Electrical connection Protocol Factory settings	Ethernet-PoE M12 X-coded, socket, IEEE 802.3af, class 1 or higher Modbus TCP IP address 192.168.0.64 (static)

General

Power supply class III  USA & Canada: Class 2 supply necessary, max. voltage 30 V DC	8 - 35 V DC 12 - 30 V AC 100 - 240 V AC, 50/60 Hz with option AM3 ¹⁾ PoE with option J4
Current consumption, (typ.) @ 24 V DC/AC 2 voltage outputs 2 current outputs additionally for display additionally for Ethernet	40 mA / 80 mA _{rms} 80 mA / 160 mA _{rms} 50 mA / 150 mA _{rms} 30 mA / 90 mA _{rms}
Electrical connection	Screw terminals max. 1.5 mm ² (AWG 16)
Cable glands for polycarbonate enclosure for metal enclosure	M16x1.5, for cable Ø3...7 mm (0.12...0.28") M16x1.5, for cable Ø4.5...10 mm (0.18...0.39")
Pressure range for pressure-tight probe Type T7/T10/T17 Type T9	0.01...20 bar (0.15...300 psi) 0.01...300 bar (0.15...4350 psi)
Temperature range electronics board operation and storage without display with display	-40...+60 °C (-40...+140 °F) -20...+50 °C (-4...+122 °F)
Probe body Material Protection rating	Stainless steel 1.4404 / AISI 316L IP65
Enclosure Material Protection rating	Polycarbonate, UL94 V-0 approved or Stainless steel 1.4404 / AISI 316 L IP65 / NEMA 4X
Electromagnetic compatibility	EN 61326-1 FCC Part15 ClassA EN 61326-2-3 ICES-003 ClassA Industrial Environment
Conformity	 
Configuration Software Interface	PCS10 Product Configuration Software (free download) USB-C, configuration cable HA010327

1) Appropriate for outdoor use, wet location, degree of pollution 2, overvoltage category II, altitude up to 3 000 m (9 843 ft)

Ordering Guide HTS801

Feature	Description	Code					
Hardware Configuration		HTS801-					
	Model	M1					
							M4
	Type	Remote probe up to 180 °C (356 °F)	T5				
		Remote probe, pressure-tight up to 20 bar (300 psi) and 180 °C (356 °F)		T10			
		Remote probe, pressure-tight up to 300 bar (4350 psi) and 180 °C (356 °F)			T9		
		Two remote probes, pressure-tight up to 20 bar (300 psi) and 180 °C (356 °F)				T17	
		Two remote probes for meteorological applications					T28
		Remote probe for cut-in fitting, pressure-tight up to 20 bar (300 psi) and 180 °C (356 °F)					T7
	Enclosure material	PC (Polycarbonate)	No code				
		Stainless steel	HS2	HS2	HS2	HS2	HS2
	Filter	Stainless steel sintered	F4	F4	F4		
		PTFE (Polytetrafluoroethylene)	F5	F5	F5	F5	F5
		Stainless steel grid, stainless steel body (180 °C / 356 °F)	F9	F9	F9	F9	F9
		PTFE membrane, stainless steel body				F11	F11
	Probe cable length	1 m (3.3 ft)					K1
		2 m (6.6 ft)	K2	K2	K2	K2	K2
		5 m (16.4 ft)	K5	K5	K5	K5	K5
		10 m (32.8 ft)	K10	K10	K10	K10	K10
	Probe length	65 mm (2.56")	L65			L65	L65
		80 mm (3.15")		L80			
		200 mm (7.87")	L200	L200	L200	L200	L200
		400 mm (15.75")	L400	L400		L400	L400
		Only with Type T28: RH: 132 mm (5.2"), T: 150 mm (5.9")					No code
	Process connection	G1/2" ISO - sliding fitting, Ø13 mm (0.51")		PA23			
		1/2" NPT - sliding fitting, Ø13 mm (0.51")		PA25			
		G1/2" ISO - cut-in fitting, Ø12 mm (0.47")			PA20		
		1/2" NPT - cut-in fitting, Ø12 mm (0.47")			PA22		
	Electrical connection	Standard ¹⁾	No code				
		1 x plug for power supply and outputs	E4				
		2 x plugs for power supply + outputs and RS485	E6				
	Digital Interface	Without digital interface	No code				
		RS485 with Modbus RTU	J3				
		Ethernet-PoE with Modbus TCP ²⁾³⁾	J4				
	Display	Without display	No code				
		3.5" TFT display with integrated data logger	D2				
	Probe connection	Fixed	No code				
		Intelligent pluggable probe (plug-and-play)	PC7	PC7		PC7 ⁵⁾	
	Sensing element protection	Without, for very low temperature applications only -70 °C...-40 °C (-94 °F...-40 °F)	C0				
		E+E proprietary coating	C1				
	Additional module	Without additional module	No code				
		ARC module for external trigger of sensor heating ³⁾⁴⁾	AM1				
		Alarm output with relay ³⁾	AM2				
		Integrated power supply 100 - 240 V AC 50/60 Hz ³⁾	AM3				

1) Standard = 2 x M16 cable glands, except for AM3 option: 2 plugs for power supply and outputs

2) No Additional Module available.

3) With electrical connection standard only (no plug options possible), no combination with other Additional Modules (AMx, J4) possible.

4) Sensor needs to be supplied with 24V AC/DC ±20 %

5) T17: RH probe pluggable, T probe fixed

Ordering Guide HTS801 (cont'd)

			T5	T10	T9	T17	T28	T7
Software Setup Analogue Outputs	Output signal ⁶⁾	0 - 1 V				GA1		
		0 - 5 V				GA2		
		0 - 10 V				GA3		
		0 - 20 mA				GA5		
		4 - 20 mA				GA6		
	Output 1 measurand	Relative humidity RH [%]			No code			
		Other measurand (xx see measurand code below)			MAxx			MAxx ⁷⁾
	Output 1 scaling low	0			No code			
		Value			SAL Value			SAL Value
	Output 1 scaling high	100			No code			
		Value			SAH Value			SAH Value
SW Config Options	ARC configuration	Temperature T [°C]			No code			
		Other measurand (xx see measurand code below)			MBxx			MBxx ⁷⁾
					No code			
	Output 2 scaling low	-40			No code			
		Value			SBL Value			SBL Value
					No code			
	Output 2 scaling high	60			No code			
		Value			SBH Value			SBH Value
					No code			
	Condensation Guard (CG)	Manual or External trigger ⁸⁾			No code			
		Cyclic automatic time trigger (24 h)			ARC1			
		@ power on + cyclic automatic time trigger (24 h)			ARC2			
SW Config Options	CG trigger	Disabled			No code			
		Enabled, no lock time			CG1			
		Enabled, lock time 30 min.			CG2			
	CG trigger	CG level 99 %RH			No code			
		CG level 95 %RH			SFT95			
					No code			
	Accredited Traceable Calibration Certificate in accordance with DIN EN ISO/IEC 17025					see www.eplusecal.com		
	ISO 9001 Calibration Certificate					see www.epluse.com/iso9001cal		

6) Applies to both outputs

7) Only with Measurand Codes Mx52/53/65/66

8) Manual: via PCS10 or display and push-buttons; External: via Modbus, ARC module

Measurand Code

For Output 1 and 2 in the Ordering Guide

Measurand	Unit	Code
		MAxx / MBxx
Relative humidity	RH %	10
Temperature	T °C °F	1 2
Dew point temperature	Td °C °F	52 53
Frost point temperature	Tf °C °F	65 66
Mixing ratio	r g/kg gr/lb	60 61
Absolute humidity	dv g/m³ gr/ft³	56 57
Wet bulb temperature	Tw °C °F	54 55
Water vapour partial pressure	e mbar psi	50 51
Specific enthalpy	h kJ/kg BTU/lb	62 64

PLEASE NOTE

No mix of SI/US units allowed.

Order Example

HTS801-M1T10HS2F9K2L200PA23E6J3D2C1GA6


Feature	Code	Description
Model	M1	RH + T
Type	T10	Remote probe, pressure-tight up to 20 bar (300 psi) and 180 °C (356 °F)
Enclosure material	HS2	Stainless steel
Filter	F9	Stainless steel grid, stainless steel body (180 °C / 356 °F)
Probe cable length	K2	2 m (6.6 ft)
Probe length	L200	200 mm (7.87")
Process connection	PA23	G1/2" ISO - sliding fitting, Ø13 mm (0.51")
Electrical connection	E6	2 x plugs for power supply + outputs and RS485
Digital interface	J3	RS485 with Modbus RTU
Display	D2	3.5" display with integrated data logger
Probe connection	No code	Fixed
Sensing element protection	C1	E+E proprietary coating
Additional module	No code	Without additional module
Output signal	GA6	4 - 20 mA
Output 1 measurand	No code	Relative humidity RH [%]
Output 1 scaling low	No code	0
Output 1 scaling high	No code	100
Output 2 measurand	No code	Temperature T [°C]
Output 2 scaling low	No code	-40
Output 2 scaling high	No code	60
ARC configuration	No code	Manual or External trigger
Condensation Guard (CG)	No code	Disabled
CG trigger	No code	CG level 99 %RH

Accessories

For further information please refer to the [Accessories](#) datasheet.

Accessories	Code
E+E Product Configuration Software (Free download: www.epluse.com/pcs10)	PCS10
USB cable for PC connection (USB-A to USB-C), 1.8 m (5.9 ft)	HA010327
Stainless steel mounting flange Ø12 mm (0.47")	HA010201
Stainless steel mounting flange Ø6 - 8 mm (0.24" - 0.31") for T probe	HA010207
Stainless steel wall mounting clip, Ø12 mm (0.47")	HA010225
Pressure-tight feed-through For probe assembly up to 20 bar (300 psi)	G 1/2" ISO Ø12 mm (0.47") 1/2" NPT Ø12 mm (0.47") G 1/2" ISO Ø6 mm (0.24") 1/2" NPT Ø6 mm (0.24")
Humidity calibration kit	see Humidity Calibration Kit data sheet
Conduit adapter US, M16x1.5 - 1/2" NPT, stainless steel	HA011101
Drip water protection	HA010503
Radiation shield with artificial ventilation for HTS801-M1T28	HA010508
Radiation shield with clamp ring (M20x1.5) for RH probe	HA010502
Radiation shield with screw-in thread (M16x1.5) for T probe	HA010506
Mounting set for mast with Ø34 - 54 mm (1.3 - 2.1")	HA010230
Bracket for DIN rail mounting ¹⁾	HA010203
Wall mounting clip, Ø12 mm (0.47")	HA010211
Immersion well - stainless steel, Ø6x135 mm (0.25 x 5.4")	1/2" ISO 1/2" NPT
RS485 kit for retrofitting	HA010605
M12 X-coded Ethernet retrofit module for remote probe, IEEE 802.3af, class 1 or higher	HA010608

1) For polycarbonate enclosure only. Two pieces are necessary for each HTS801.

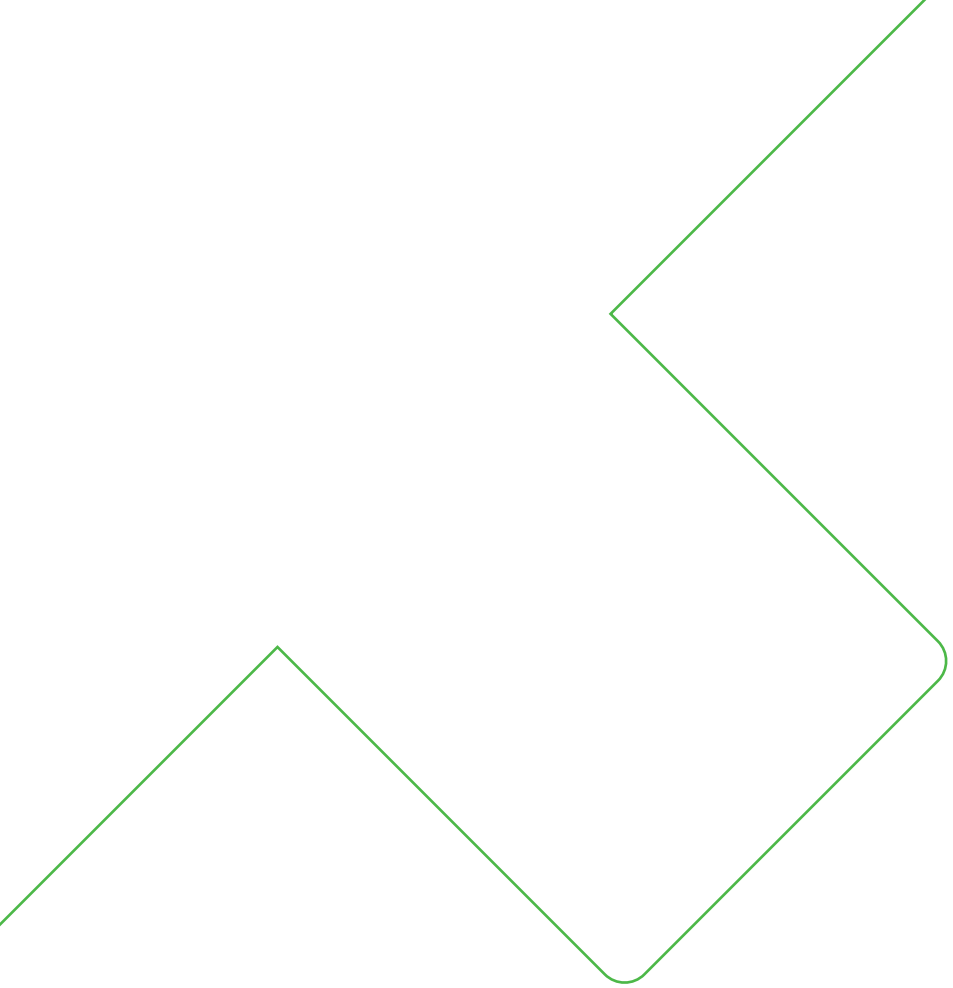

Company Headquarters &
Production Site

E+E Elektronik Ges.m.b.H.
Langwiesen 7
4209 Engerwitzdorf | Austria
T +43 7235 605-0
F +43 7235 605-8
info@epluse.com
www.epluse.com

Subsidiaries

E+E Sensor Technology (Shanghai) Co., Ltd.
T +86 21 6117 6129
info@epluse.cn

E+E Elektronik France SARL
T +33 4 74 72 35 82
info.fr@epluse.com

E+E Elektronik Deutschland GmbH
T +49 6171 69411-0
info.de@epluse.com

E+E Elektronik India Private Limited
T +91 990 440 5400
info.in@epluse.com

E+E Elektronik Italia S.r.l.
T +39 02 2707 86 36
info.it@epluse.com

E+E Elektronik Korea Ltd.
T +82 31 732 6050
info.kr@epluse.com

E+E Elektronik Corporation
T +1 847 490 0520
info.us@epluse.com



—
your partner
in sensor
technology.